


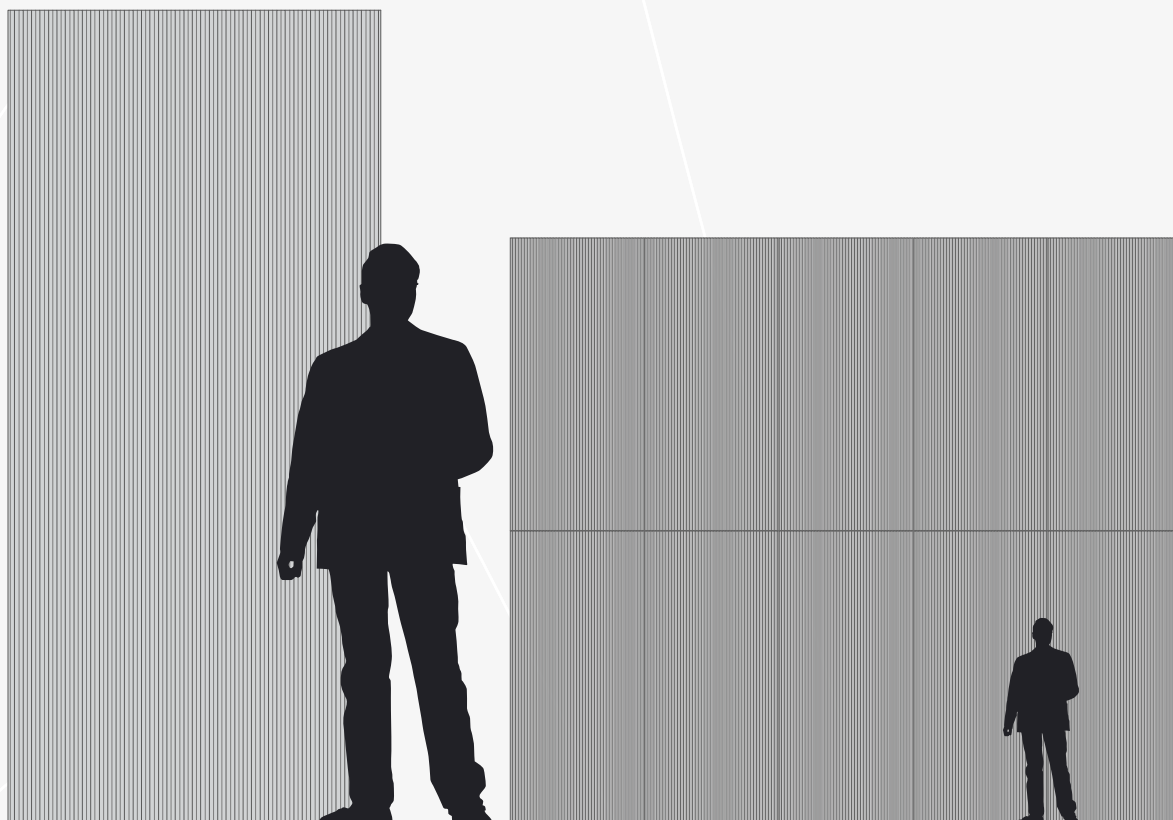

Standard module: 1150x2500 mm

MATERIAL

Full sheet in aluminum, stainless steel, iron, galvanized iron, brass, copper.
Perforated sheet in aluminum, stainless steel, iron, galvanized iron.
Wire mesh in stainless steel.

SURFACE FINISHING

Natural metal, powder coating, liquid painting, anodizing, electro-coloring,
polished and satin metal.


SCOPE OF USE

Facade cladding, interior cladding, false ceilings, railings, etc.


TECHNICAL SPECIFICATIONS


PANEL SIZE	1150x2500 mm (maximum length on request up to 2600 mm)
THICKNESS	from 0,5 mm to 2 mm
PATTERN DEPTH	3 mm

LINE / FULL SHEET

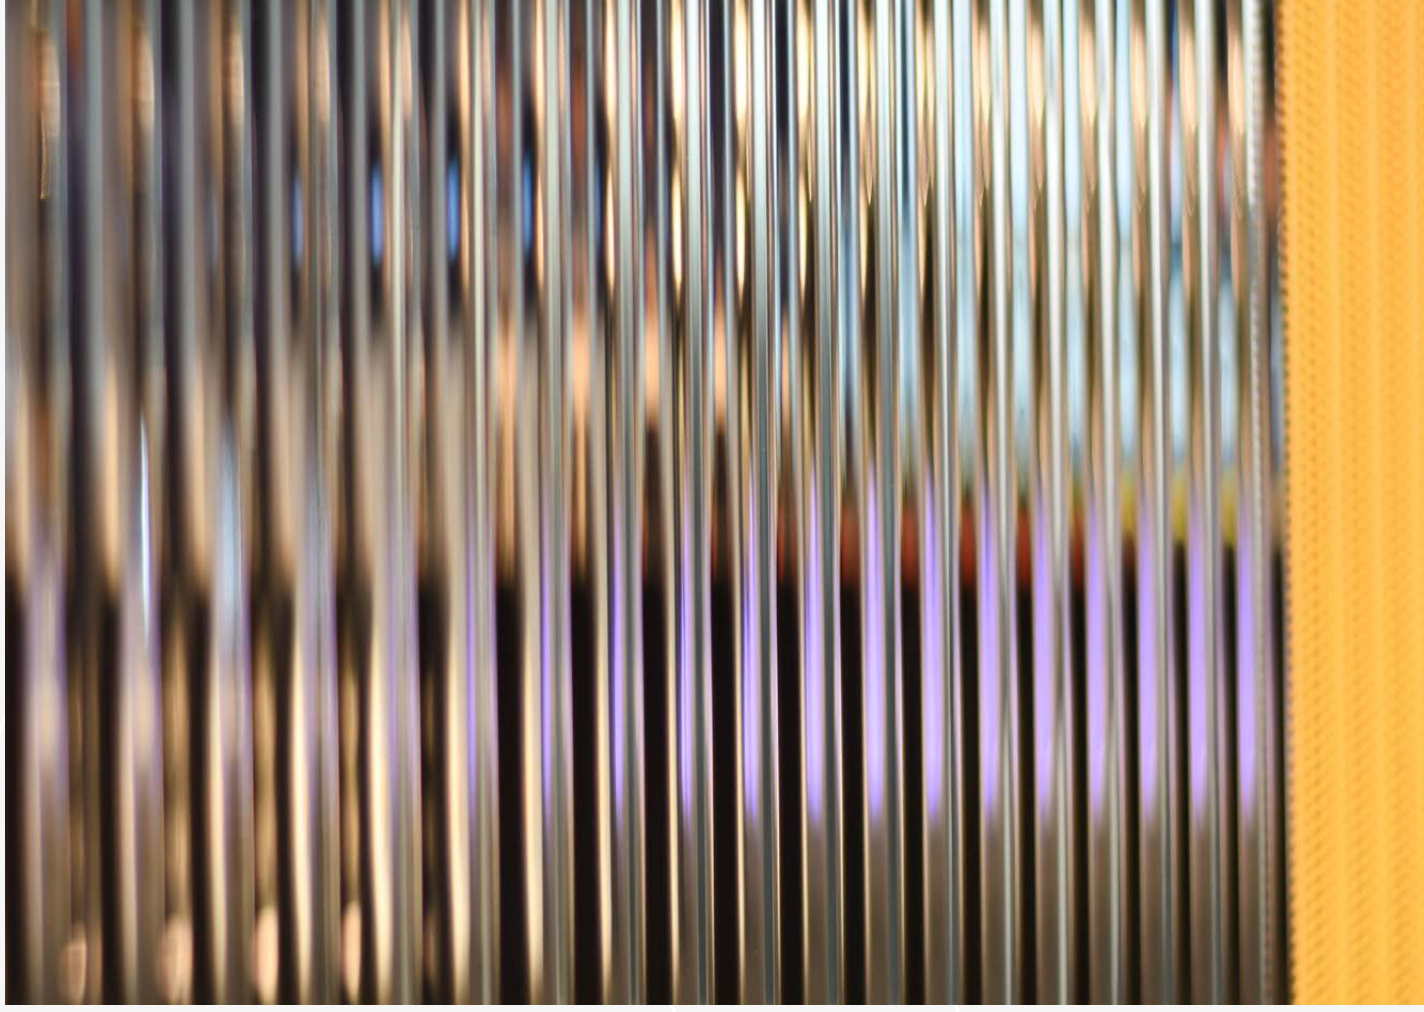

LINE / PERFORATED SHEET

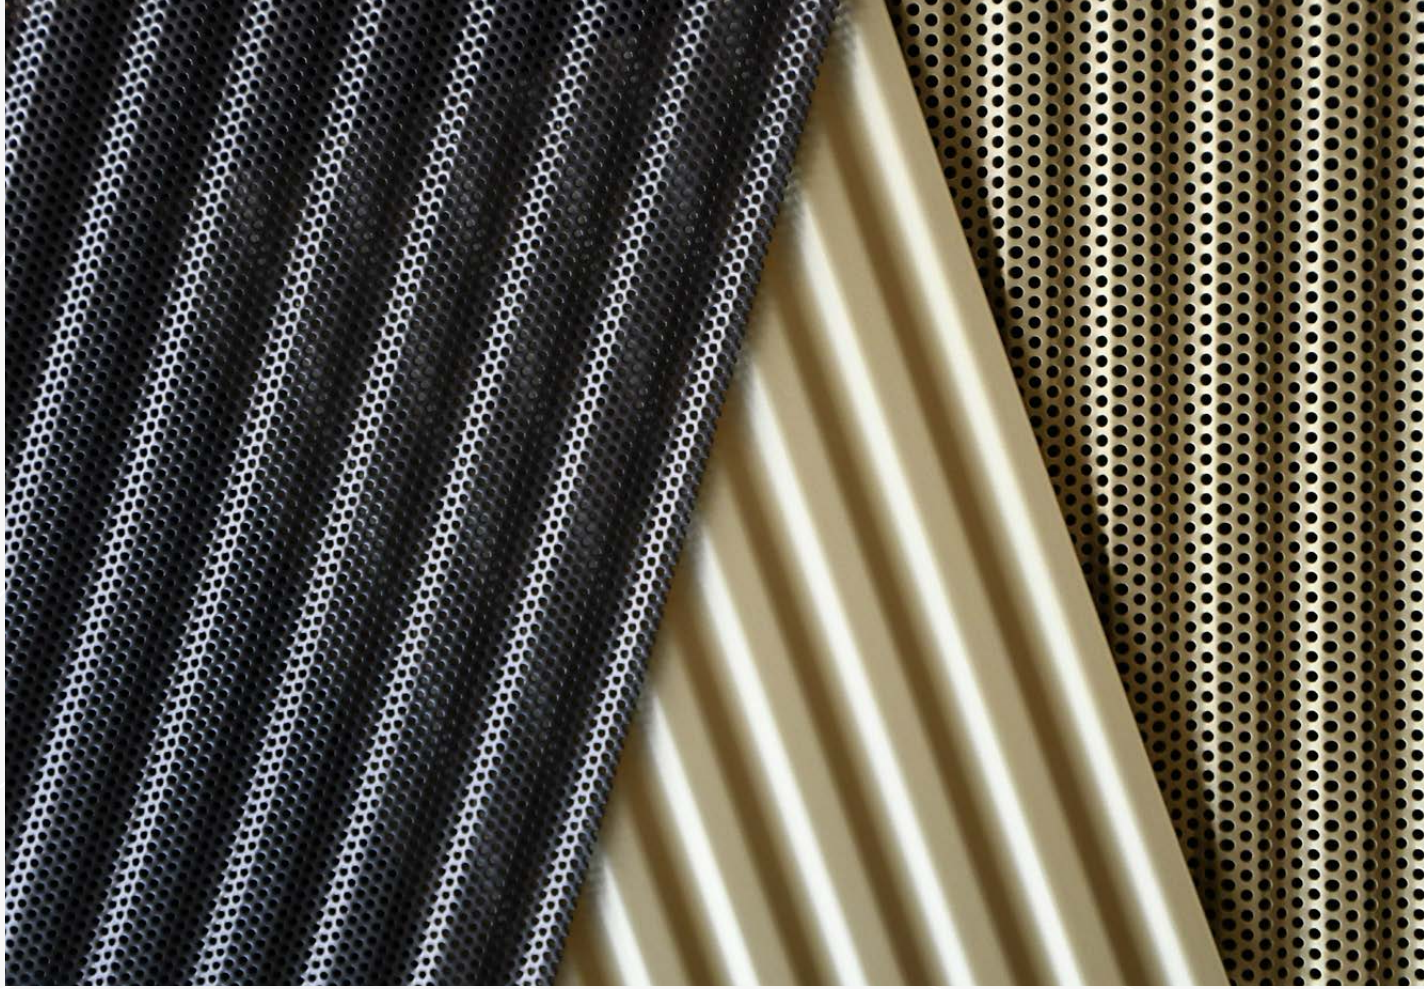

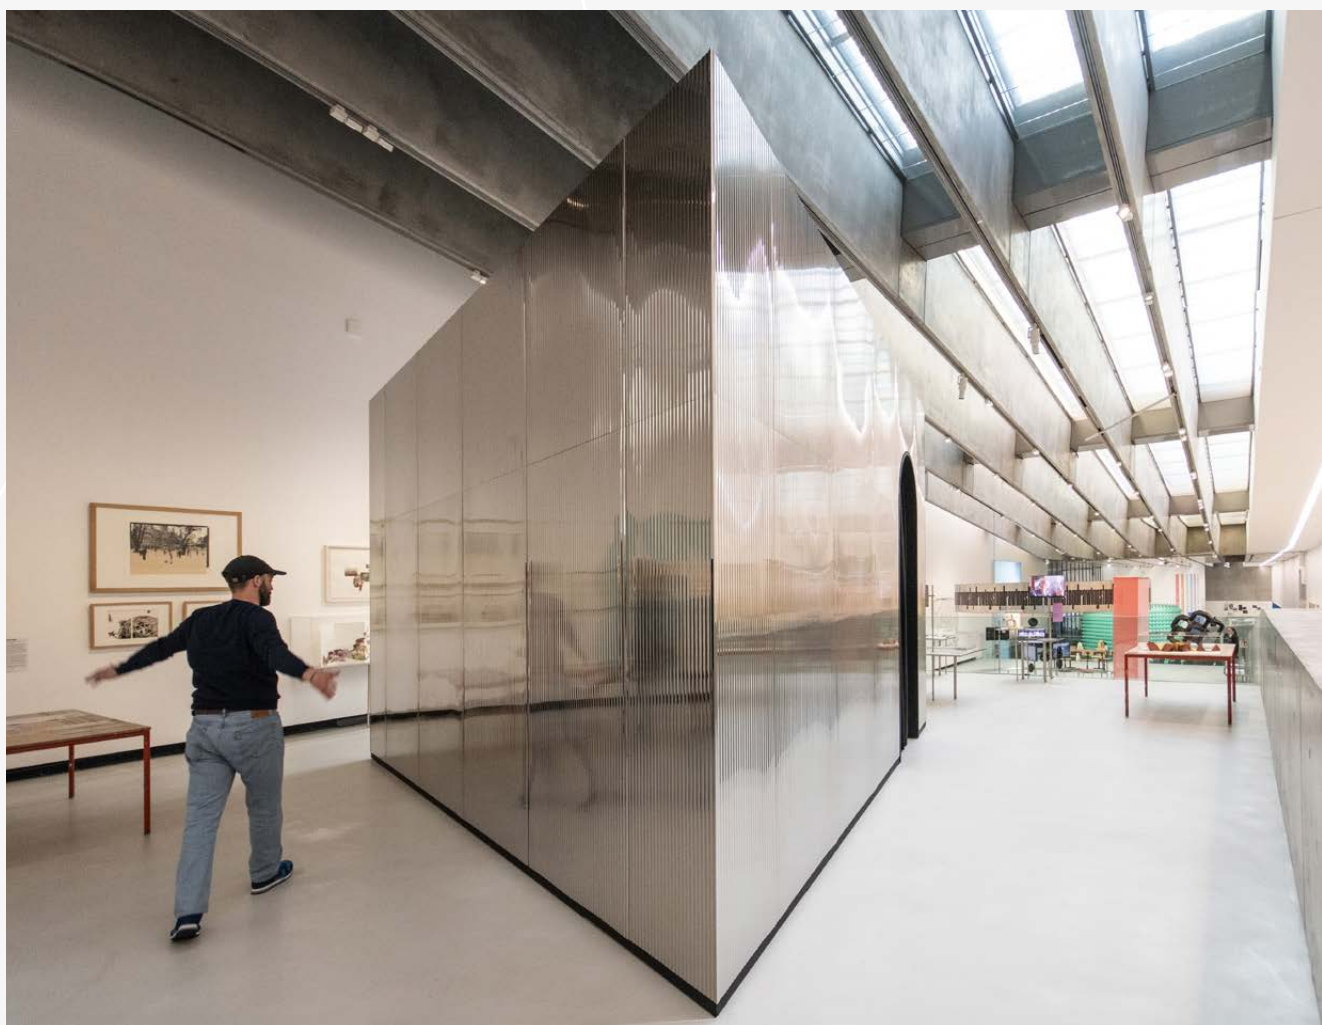


LINE



THE EMBOSS
PROJECTS




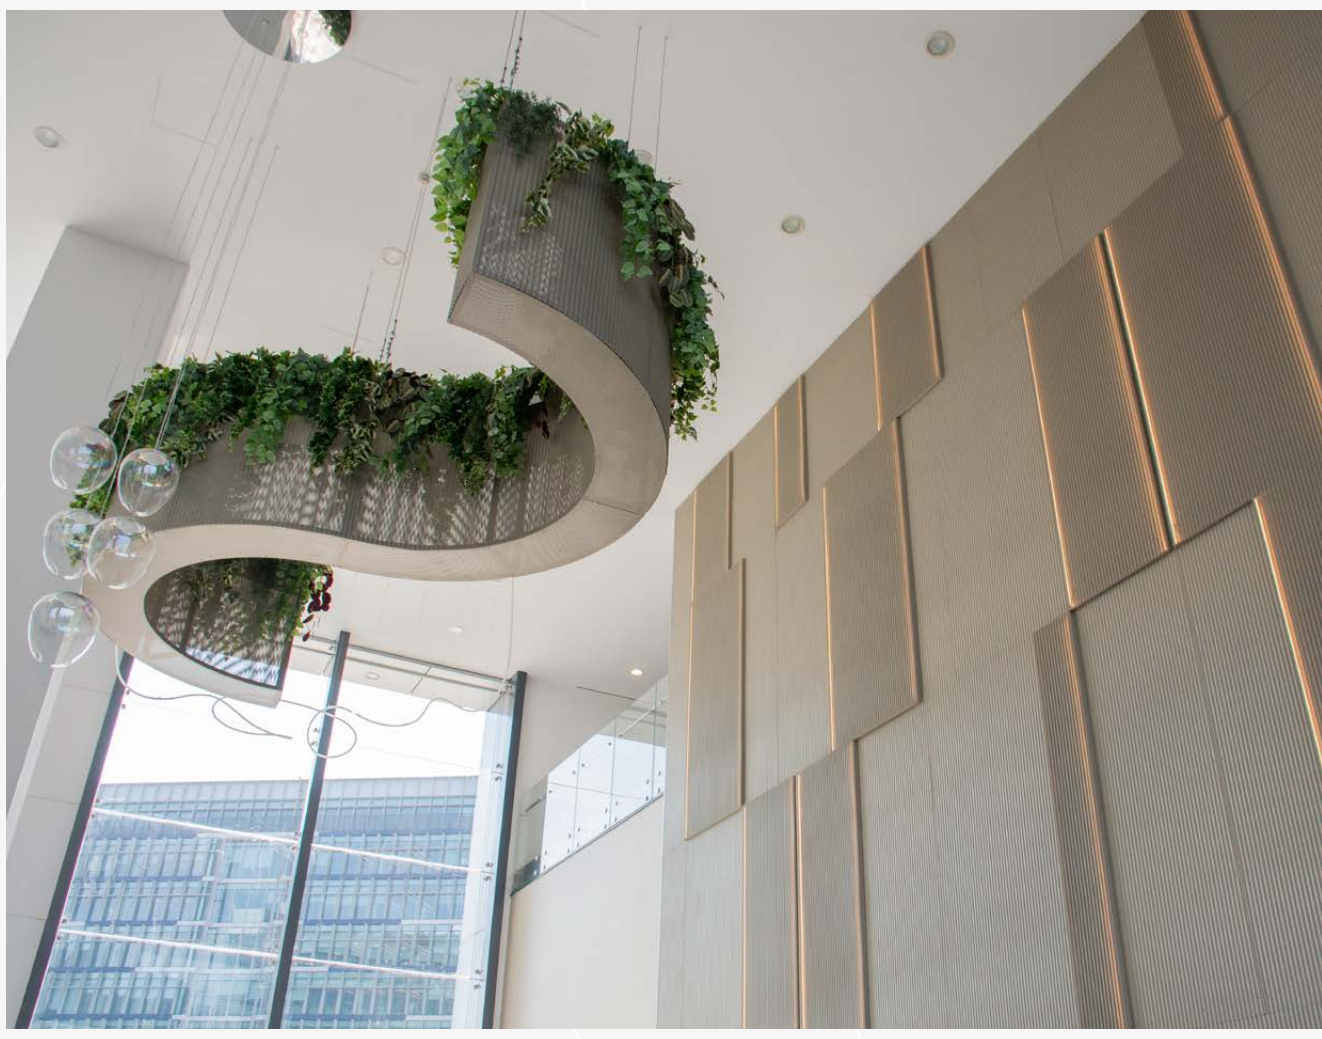

LINE



THE EMBOSS
PROJECTS

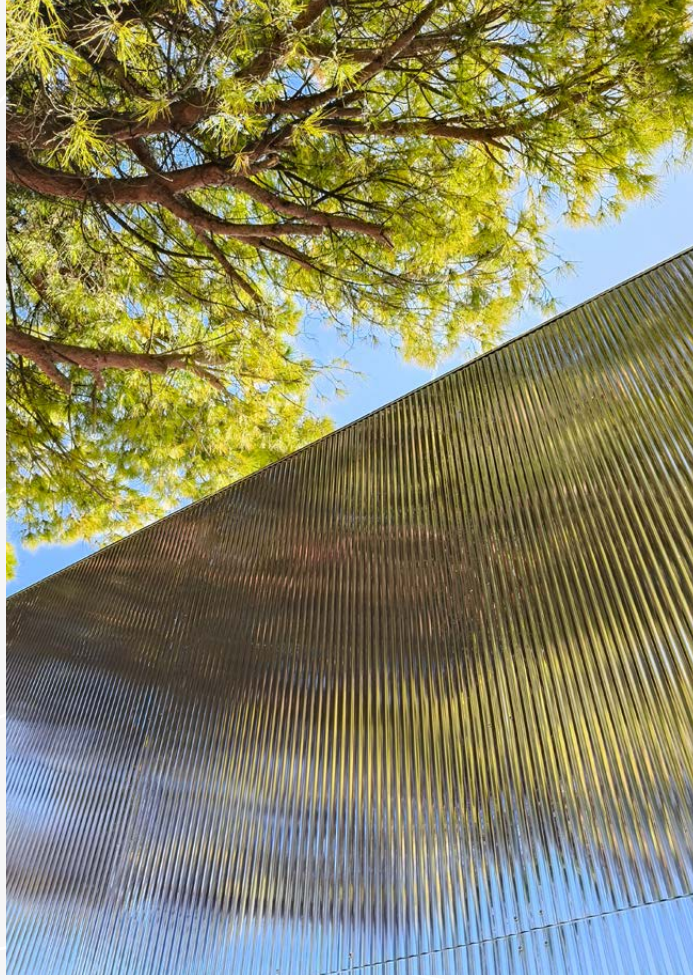


FASTENING SYSTEM




EMBOSS SYSTEM 01

HORIZONTAL SECTION TYPE, 1:2

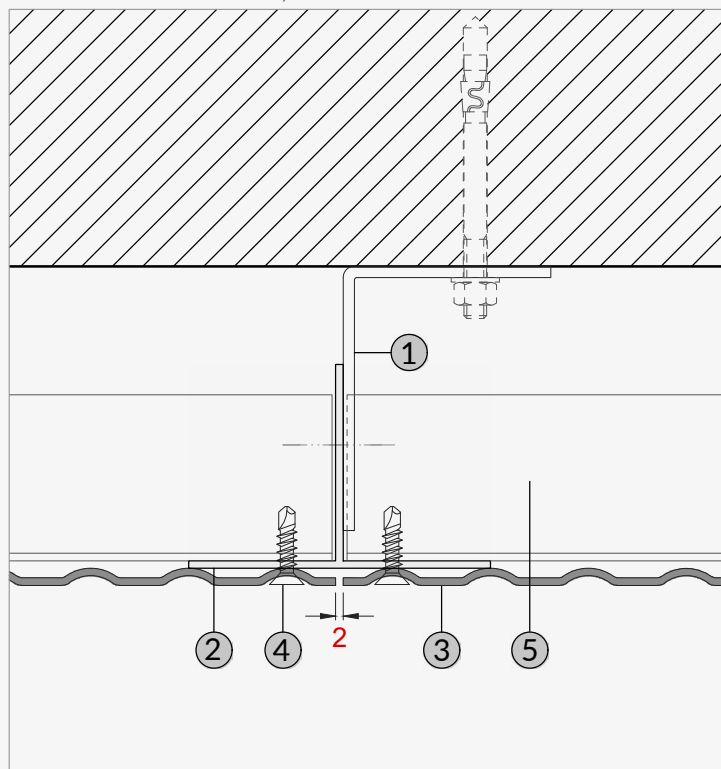


VERTICAL SECTION TYPE, 1:2

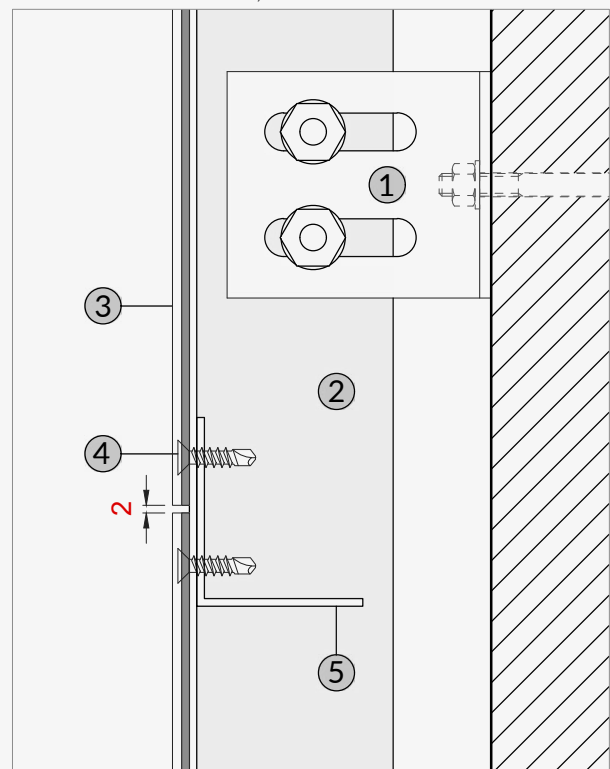


legend: 1_wall bracket, 2_aluminum strut (T profile), 3_EMBOSS panel, 4_screw or rivet, 5_stiffening profile

EMBOSS SYSTEM 02

HORIZONTAL SECTION TYPE, 1:2

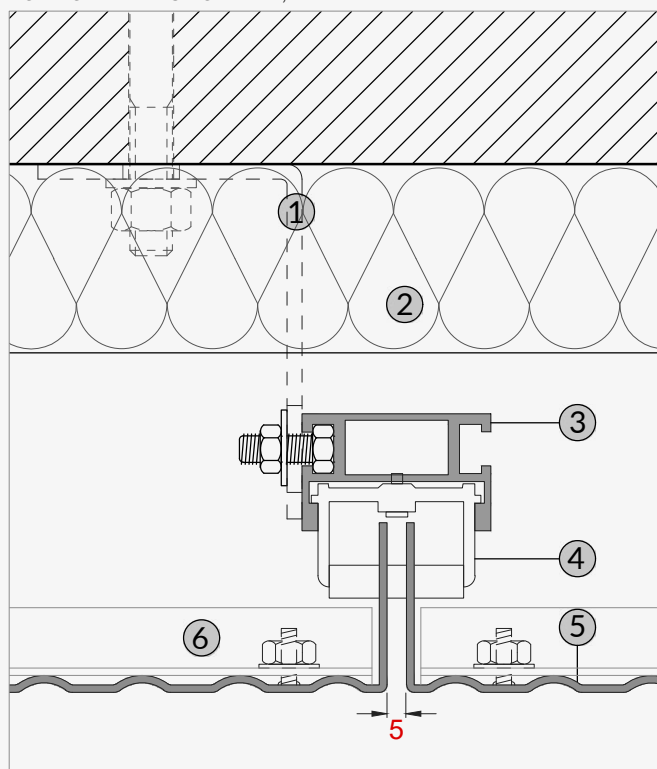

VERTICAL SECTION TYPE, 1:2

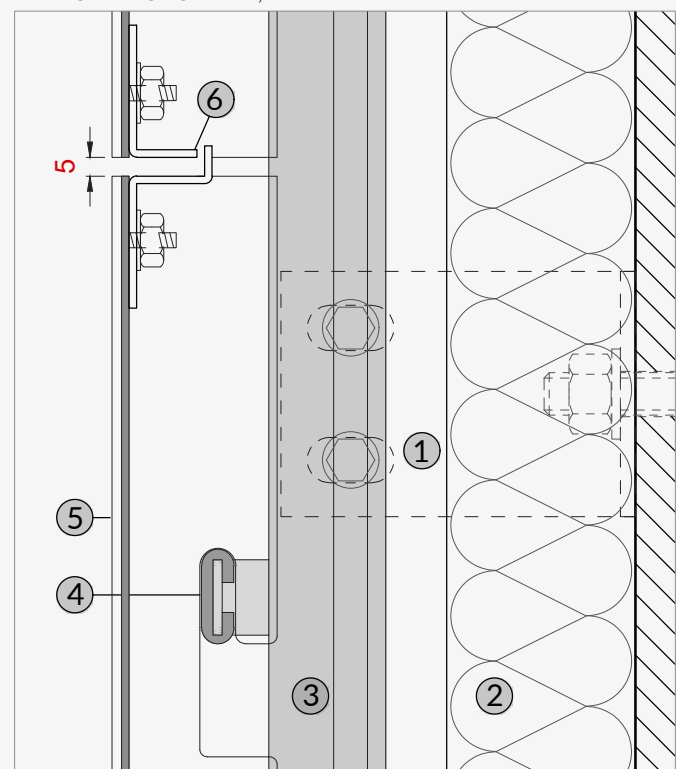

legend: 1_wall bracket, 2_insulating coat, 3_aluminum strut, 4_panel's support with anti-vibration gasket, 5_boxed EMBOSS panel, 6_stiffening profile