


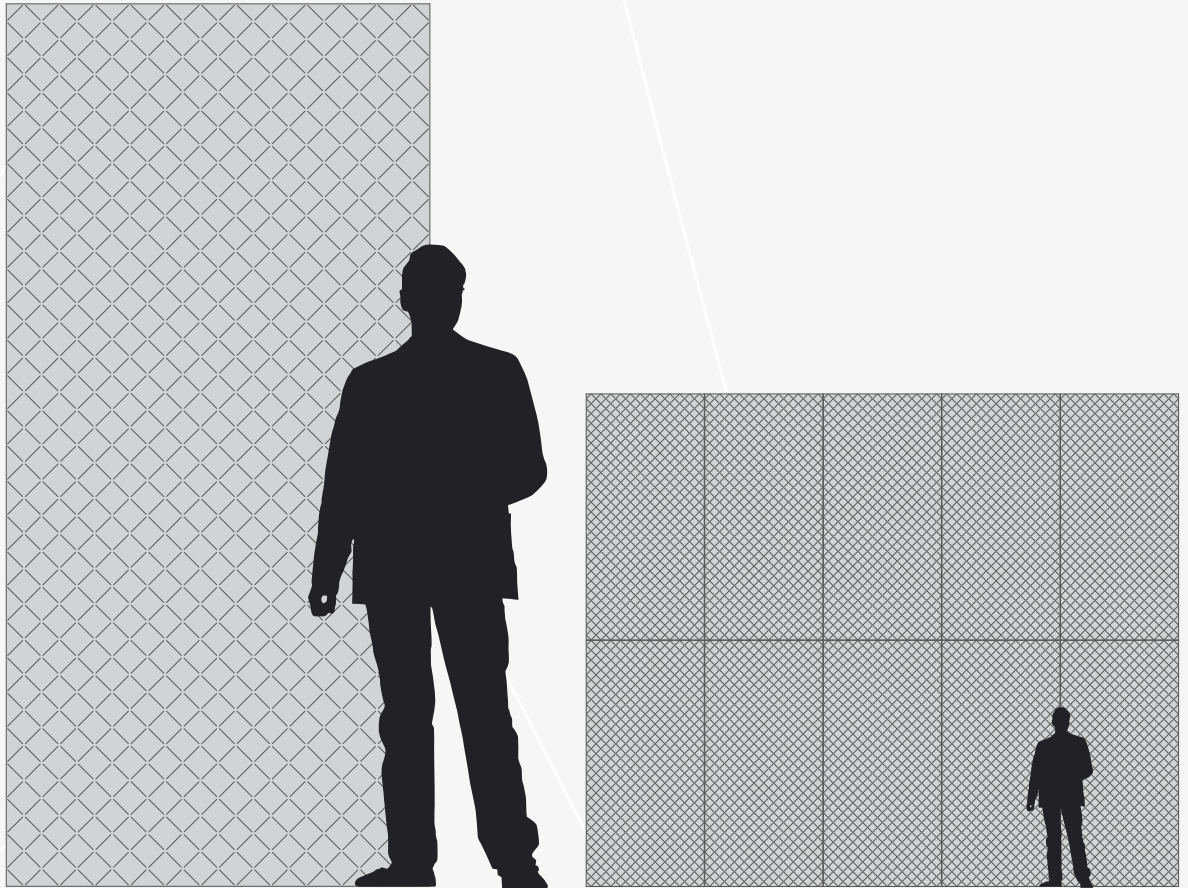

Standard module: 1250x2500 mm

MATERIAL

Full sheet in aluminum, stainless steel, iron, galvanized iron, brass, copper.
Perforated sheet in aluminum, stainless steel, iron, galvanized iron.

SURFACE FINISHING

Natural metal, powder coating, liquid painting, anodizing, electro-coloring,
polished and satin metal, corten steel.


SCOPE OF USE

Facade cladding, interior cladding, false ceilings, railings, etc.


TECHNICAL SPECIFICATIONS

PANEL SIZE	1250x2500 mm
THICKNESS	from 0,5 mm to 3 mm
PATTERN DEPTH	6 mm

QUILT / FULL SHEET

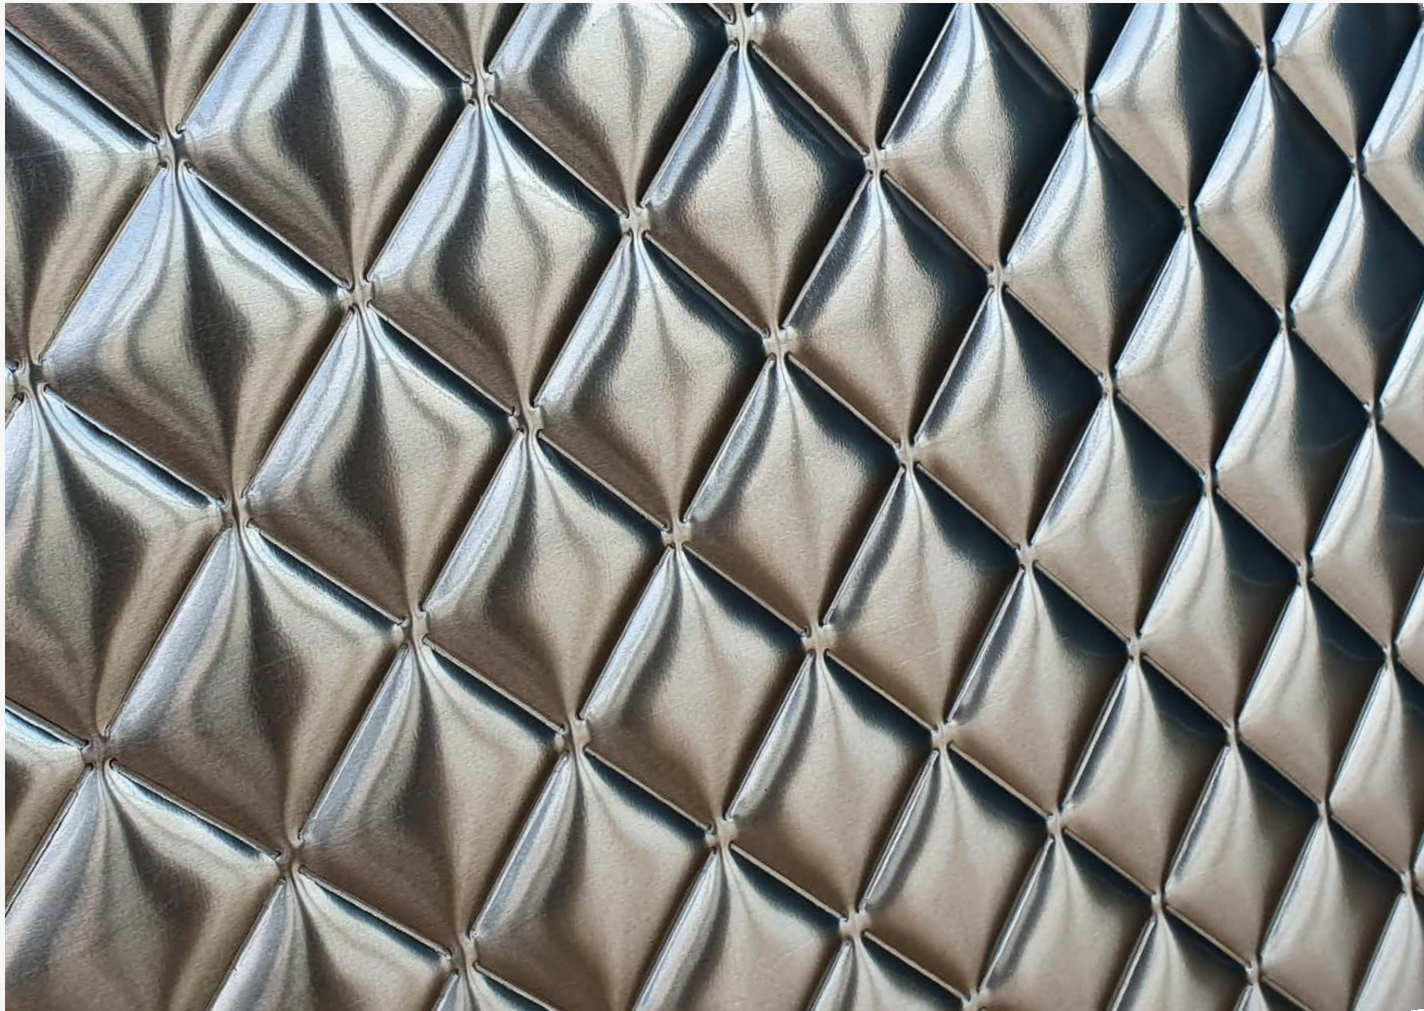


QUILT / PERFORATED SHEET

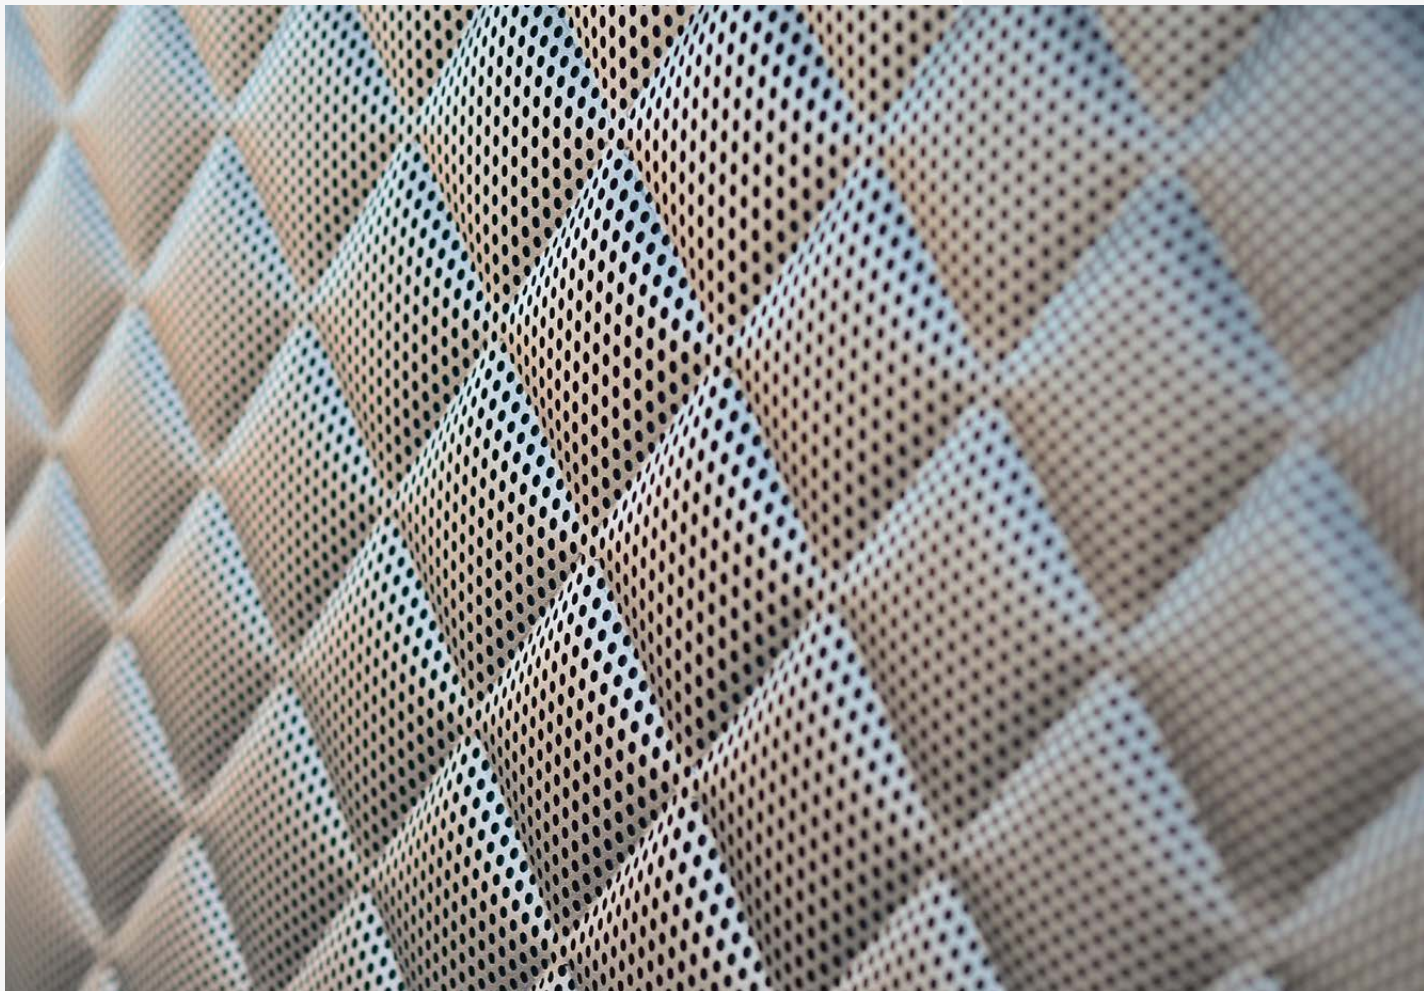

QUILT




THE EMBOSS
PROJECTS

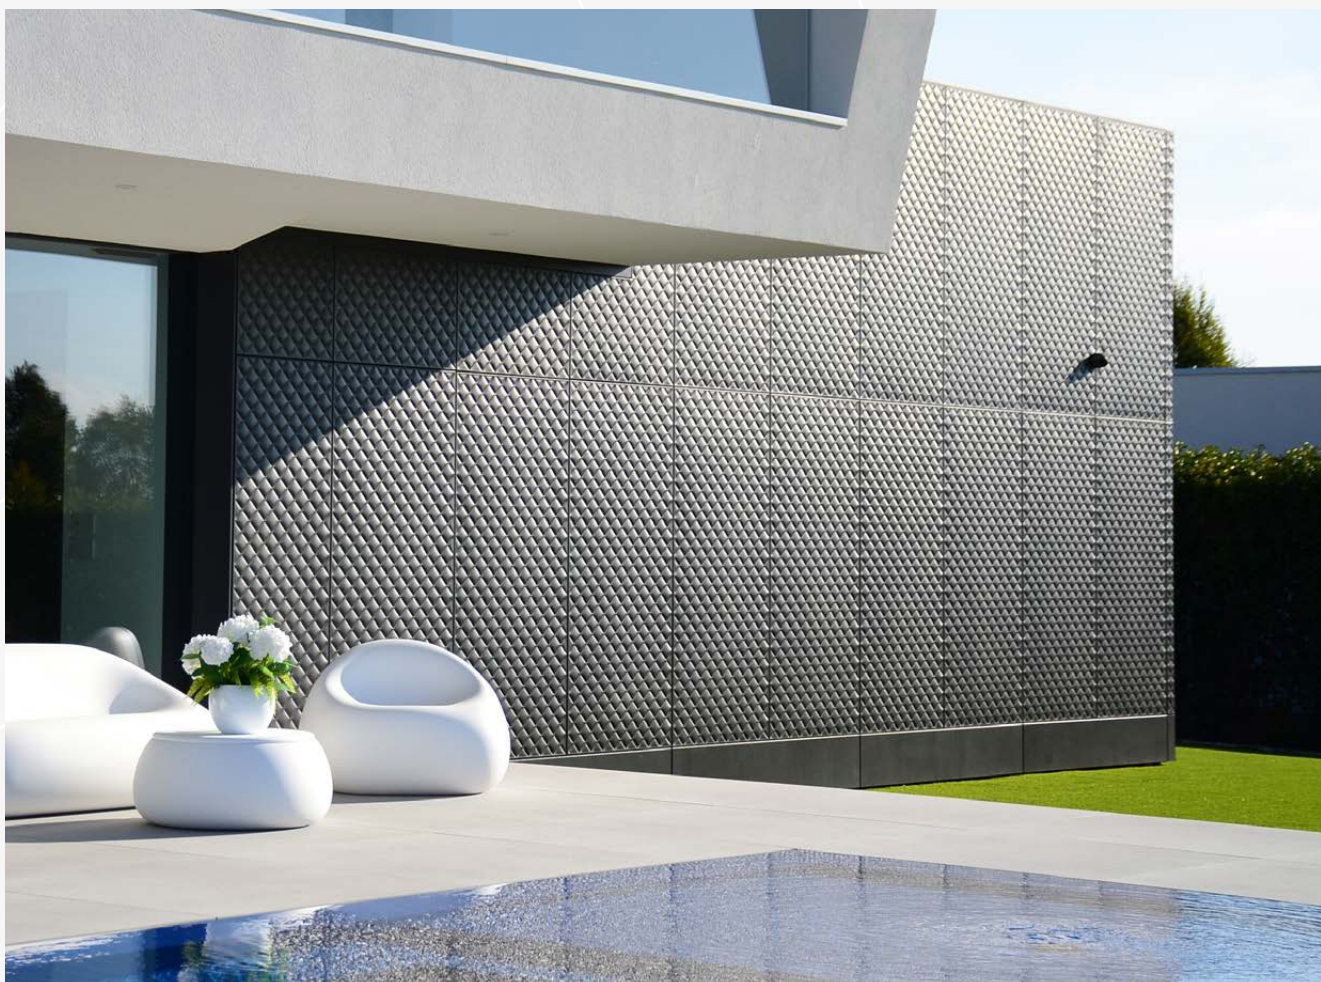

QUILT




THE EMBOSS
PROJECTS

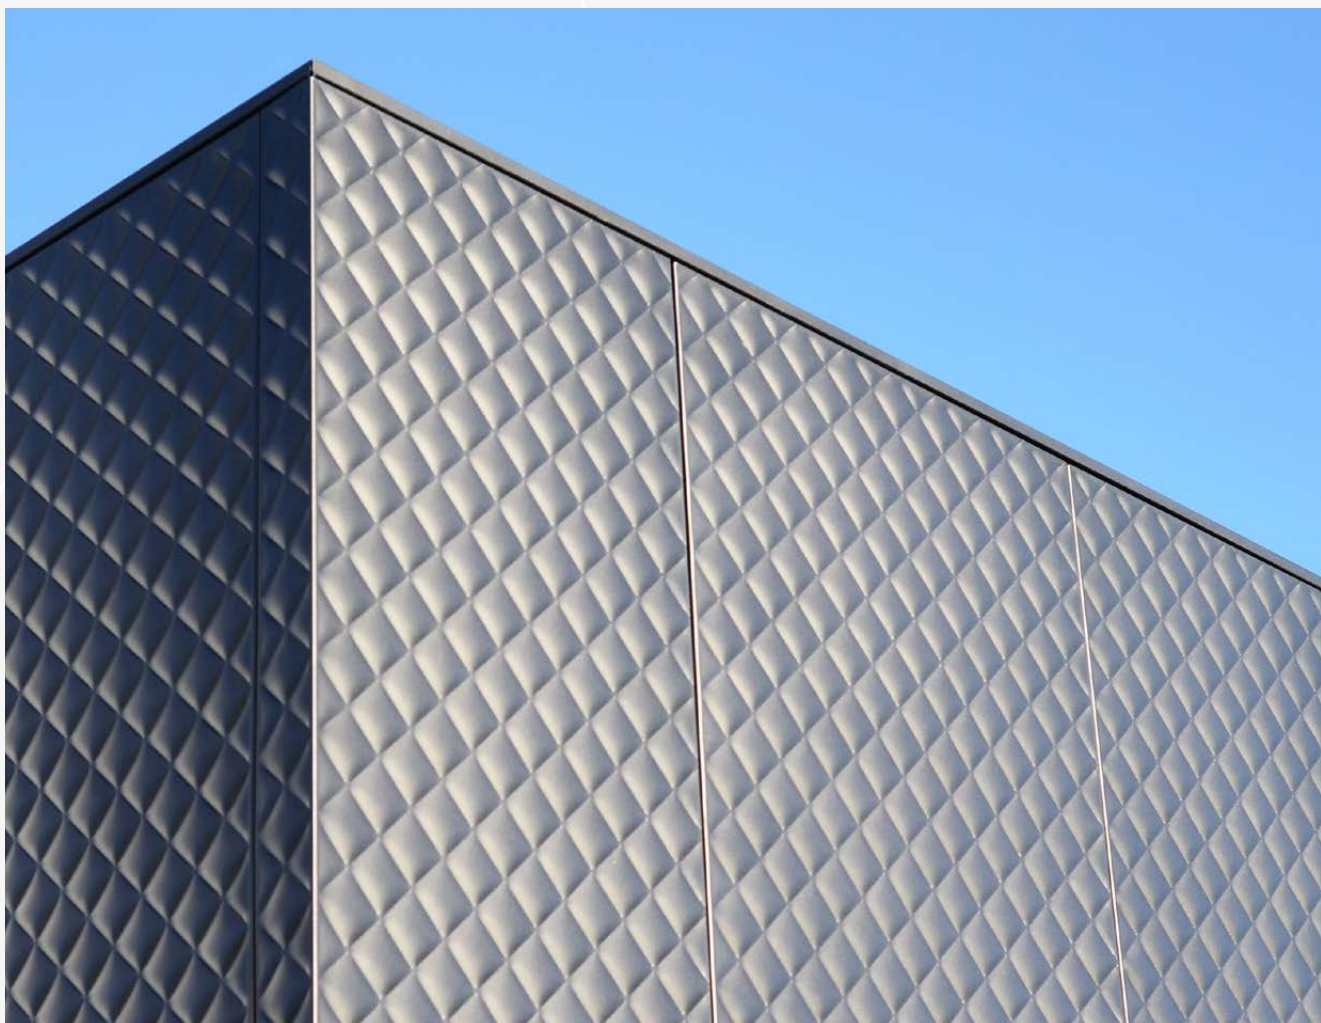




EMBOSS SYSTEM 01

HORIZONTAL SECTION TYPE, 1:2

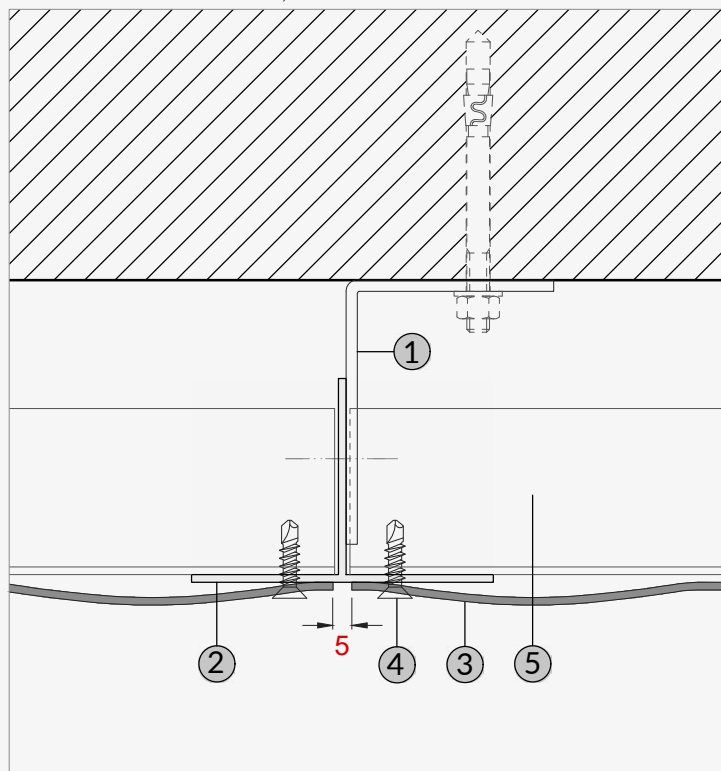


VERTICAL SECTION TYPE, 1:2

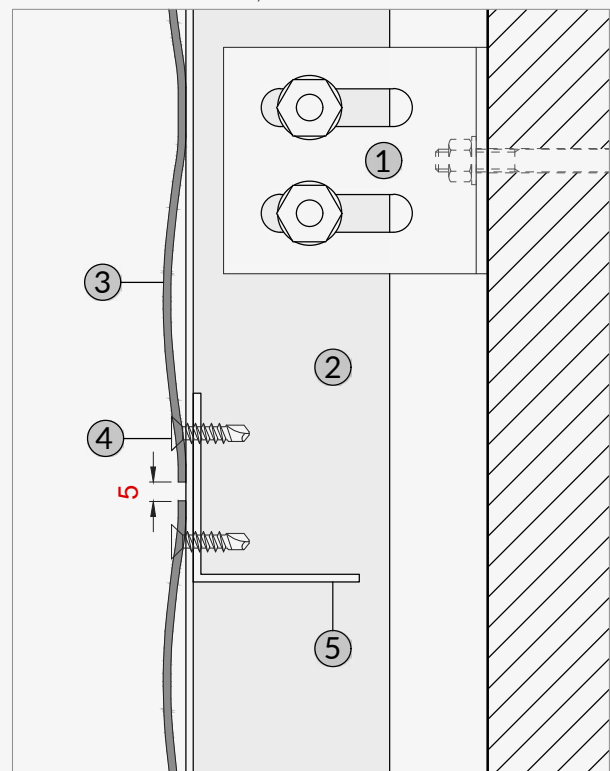


legend: 1_wall bracket, 2_aluminum strut (T profile), 3_EMBOSS panel, 4_screw or rivet, 5_stiffening profile

EMBOSS SYSTEM 02

HORIZONTAL SECTION TYPE, 1:2

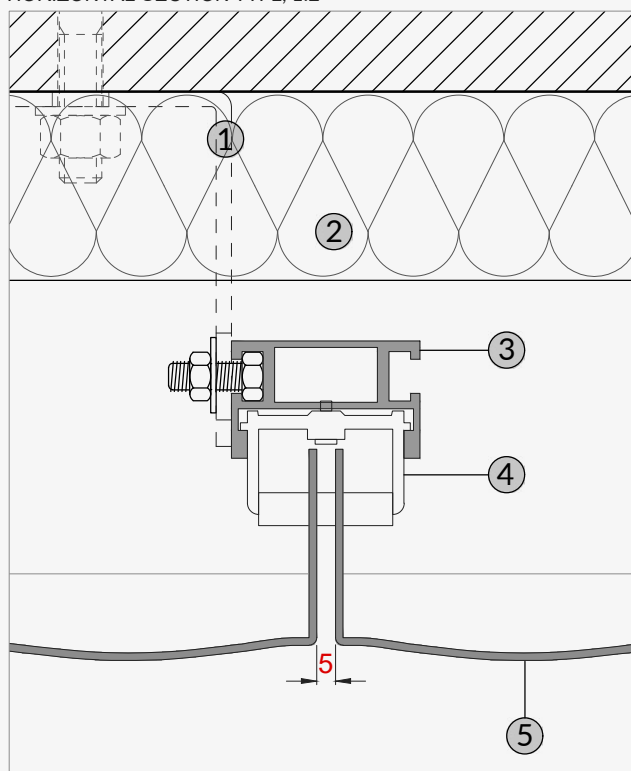

VERTICAL SECTION TYPE, 1:2

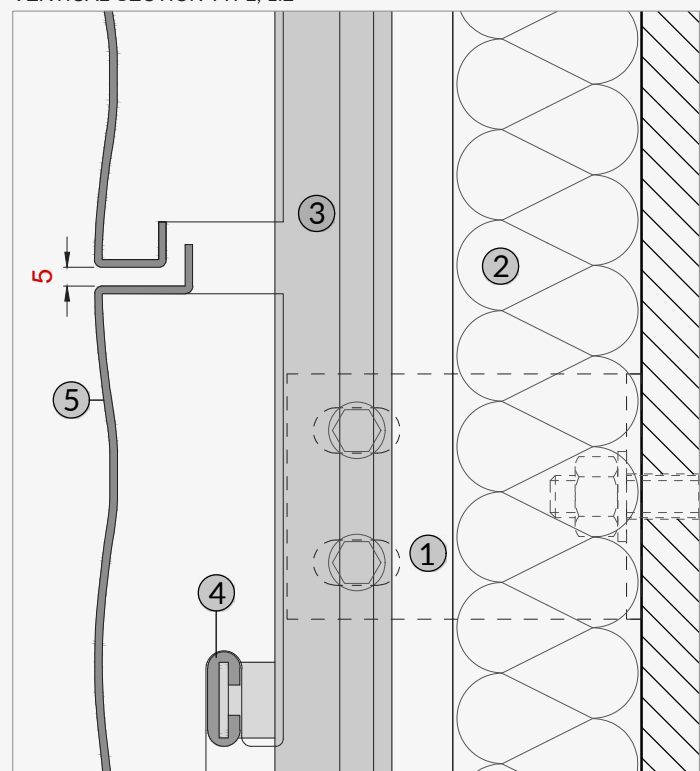

legend: 1_wall bracket, 2_insulating coat, 3_aluminum strut, 4_panel's support with anti-vibration gasket, 5_boxed EMBOSS panel